




1-1/4" CELLFLEX® Ultraflexible Foam-Dielectric Coaxial Cable

Product Description

CELLFLEX® 1-1/4" SERIES "A" low loss ultraflexible cable

Application: Main feed line

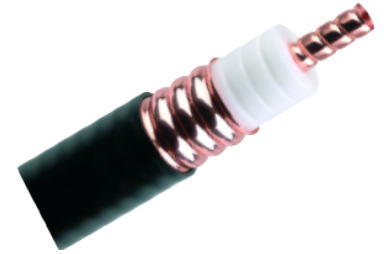

7/8" CELLFLEX® Ultra-Flexible Low-Loss Foam Dielectric Coaxial Cable

Features/Benefits

- Low Attenuation**
The low attenuation of CELLFLEX® coaxial cable results in highly efficient signal transfer in your RF system.
- Complete Shielding**
The solid outer conductor of CELLFLEX® coaxial cable creates a continuous RFI/EMI shield that minimizes system interference.
- Low VSWR**
Special low VSWR versions of CELLFLEX® coaxial cables contribute to low system noise.
- Outstanding Intermodulation Performance**
CELLFLEX® coaxial cable's solid inner and outer conductors virtually eliminate intermods. Intermodulation performance is also confirmed with state-of-the-art equipment at the RFS factory.
- High Power Rating**
Due to their low attenuation, outstanding heat transfer properties and temperature stabilized dielectric materials, CELLFLEX® cable provides safe long term operating life at high transmit power levels.
- Wide Range of Application**
Typical areas of application are: feedlines for broadcast and terrestrial microwave antennas, wireless cellular, PCS and ESMR base stations, cabling of antenna arrays, and radio equipment interconnects.

Frequency [MHz]	Attenuation		Power [kW]
	[dB/100m]	[dB/100ft]	
0.5	0.0597	0.0182	178
1.0	0.0846	0.0258	131
1.5	0.104	0.0316	107
2.0	0.120	0.0366	92.2
10	0.271	0.0825	40.8
20	0.386	0.118	28.7
30	0.475	0.145	23.3
50	0.619	0.189	17.9
88	0.831	0.253	13.3
100	0.889	0.271	12.4
108	0.926	0.282	11.9
150	1.10	0.336	10.0
174	1.19	0.364	9.26
200	1.29	0.392	8.60
300	1.60	0.488	6.90
400	1.87	0.571	5.90
450	2.00	0.610	5.53
500	2.12	0.646	5.21
512	2.15	0.655	5.14
600	2.35	0.716	4.71
700	2.56	0.781	4.32
800	2.76	0.842	4.00
824	2.81	0.857	3.93
894	2.94	0.897	3.75
900	2.96	0.901	3.74
925	3.00	0.915	3.68
960	3.07	0.935	3.60
1000	3.14	0.957	3.52
1250	3.57	1.09	3.09
1500	3.98	1.21	2.78
1700	4.28	1.31	2.58
1800	4.43	1.35	2.49
2000	4.72	1.44	2.34
2100	4.86	1.48	2.27
2200	5.00	1.52	2.21
2400	5.27	1.61	2.10
3000	6.05	1.84	1.83
3300	6.42	1.96	1.72

Attenuation at 20°C (68°F) cable temperature
Mean power rating at 40°C (104°F) ambient temperature

Technical Features

Structure

Inner conductor:	Corrugated Copper Tube	[mm (in)]	13.6 (0.54)
Dielectric:		[mm (in)]	31.2 (1.23)
Outer conductor:	Corrugated Copper	[mm (in)]	36.0 (1.42)
Jacket:	Polyethylene, PE	[mm (in)]	39.0 (1.54)

Mechanical Properties

Weight, approximately	[kg/m (lb/ft)]	0.81 (0.55)
Minimum bending radius, single bending	[mm (in)]	150 (6.0)
Minimum bending radius, repeated bending	[mm (in)]	250 (10)
Bending moment	[Nm (lb-ft)]	36.0 (25.6)
Max. tensile force	[N (lb)]	2900 (650)
Recommended / maximum clamp spacing	[m (ft)]	1.0 / 1.2 (3.25 / 4.0)

Electrical Properties

Characteristic impedance	[Ω]	50 +/- 1
Relative propagation velocity	[%]	89
Capacitance	[pF/m (pF/ft)]	75 (22.9)
Inductance	[pH/m (pH/ft)]	0.184 (0.056)
Max. operating frequency	[GHz]	3.6
Jacket spark test RMS	[V]	10000
Peak power rating	[kW]	178
RF Peak voltage rating	[V]	4200
DC-resistance inner conductor	[Ω/km (Ω/1000ft)]	1.94 (0.59)
DC-resistance outer conductor	[Ω/km (Ω/1000ft)]	0.55 (0.17)

Recommended Temperature Range

Storage temperature	[°C (°F)]	-70 to +85 (-94 to +185)
Installation temperature	[°C (°F)]	-40 to +60 (-40 to +140)
Operation temperature	[°C (°F)]	-50 to +85 (-58 to +185)

Other Characteristics

Fire Performance: Halogene Free

VSWR Performance: Standard [dB (VSWR)]

Contact RFS for your VSWR performance specification for your required frequency band.

Other Options: Phase stabilized and phase matched cables and assemblies are available upon request.

All information contained in the present datasheet is subject to confirmation at time of ordering